

Formation 1004/8/16 VXH4/8/16


1- Entrer dans le menu puis sélectionner « Config Système »



2- Entrer dans le menu « Réseau »




- 3- Saisir une Adresse IP Valide et libre sur le réseau, le masque de sous réseau, la passerelle, le port 80 pour le WEB et le 6100 en RTSP puis « Appliquer ».

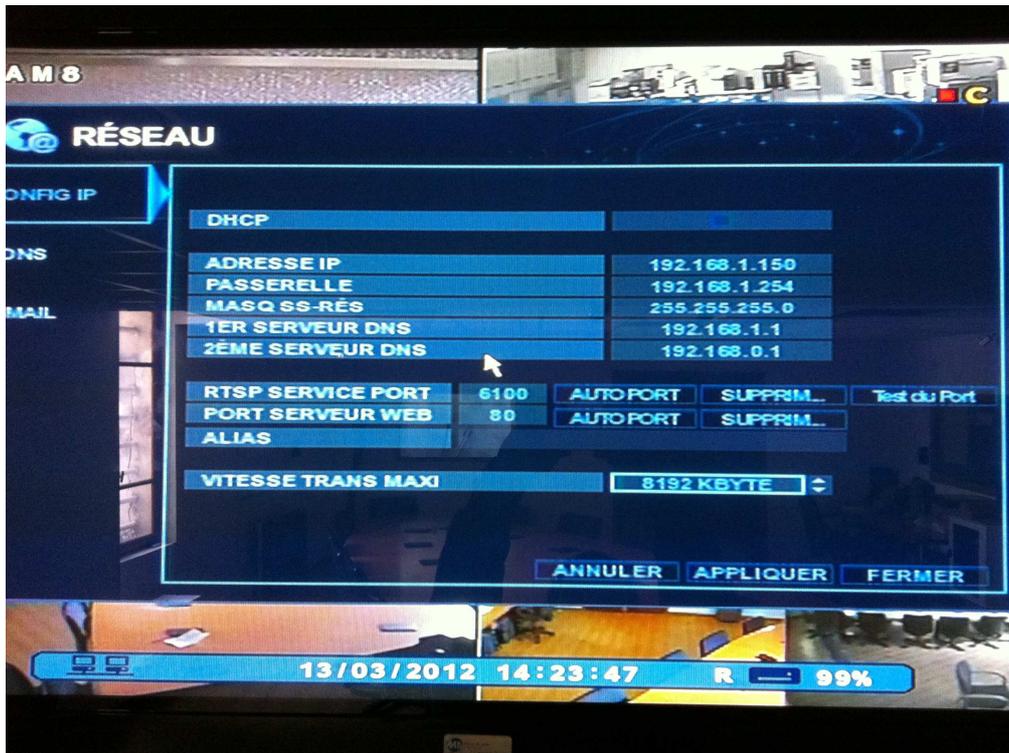

- 4- Ouvrir Apple Store sur l'Iphone du client



5- Dans la recherche, taper « VXH264 Pro » puis cliquer sur le résultat

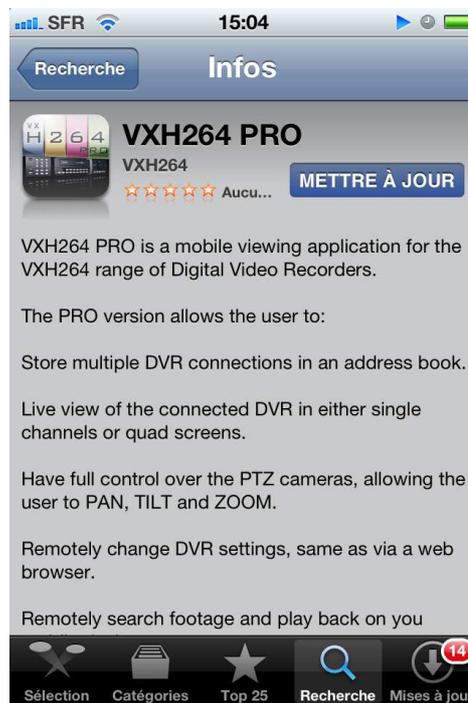


6- Cliquez sur installer puis lancer l'application VXH264 Pro




7- Cliquer sur le « + » (en haut à gauche)

8- Entrer le nom du site dans « Server Name » puis cliquer sur « Save »

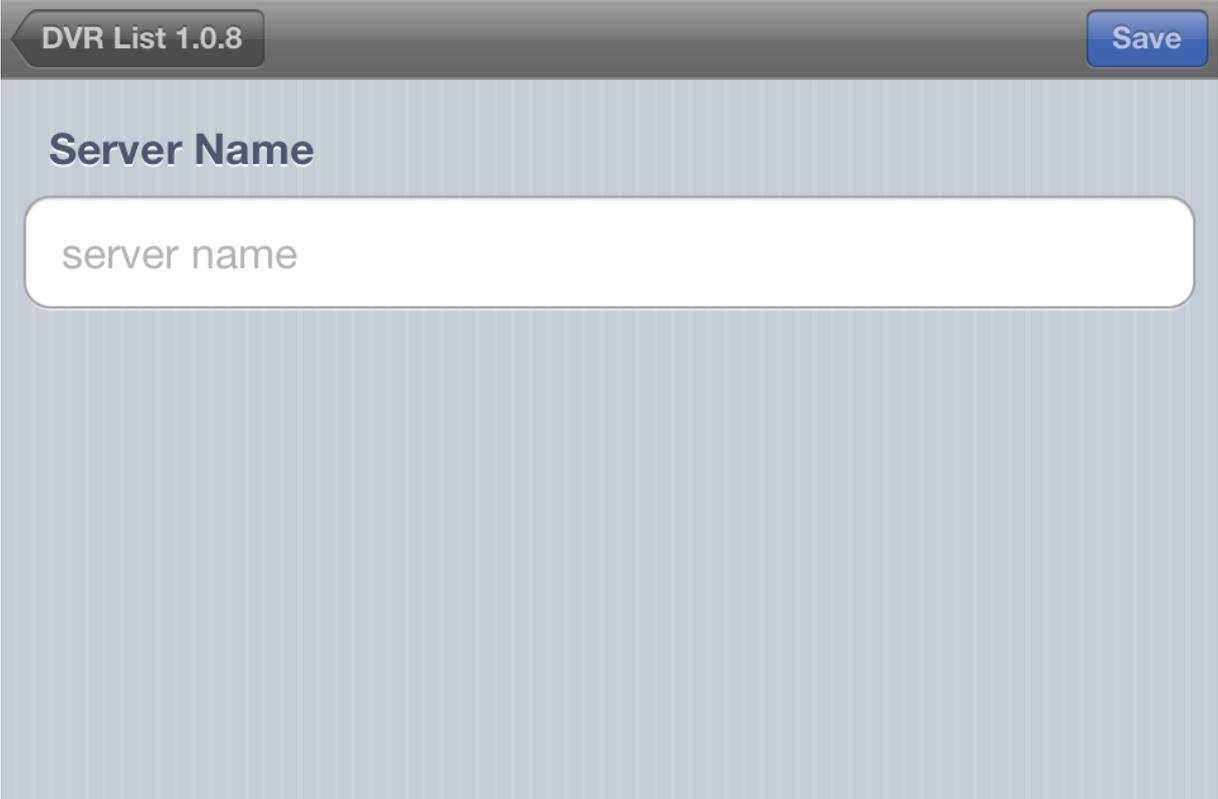


The screenshot shows a mobile application interface titled "DVR List 1.0.8". In the top right corner, there is a blue "Save" button. Below the title, the heading "Server Name" is displayed. Underneath, there is a large white text input field containing the placeholder text "server name".

9- Entrer l'adresse IP ainsi que 80 pour le http et 6100 pour le RTSP puis cliquer sur « Save »

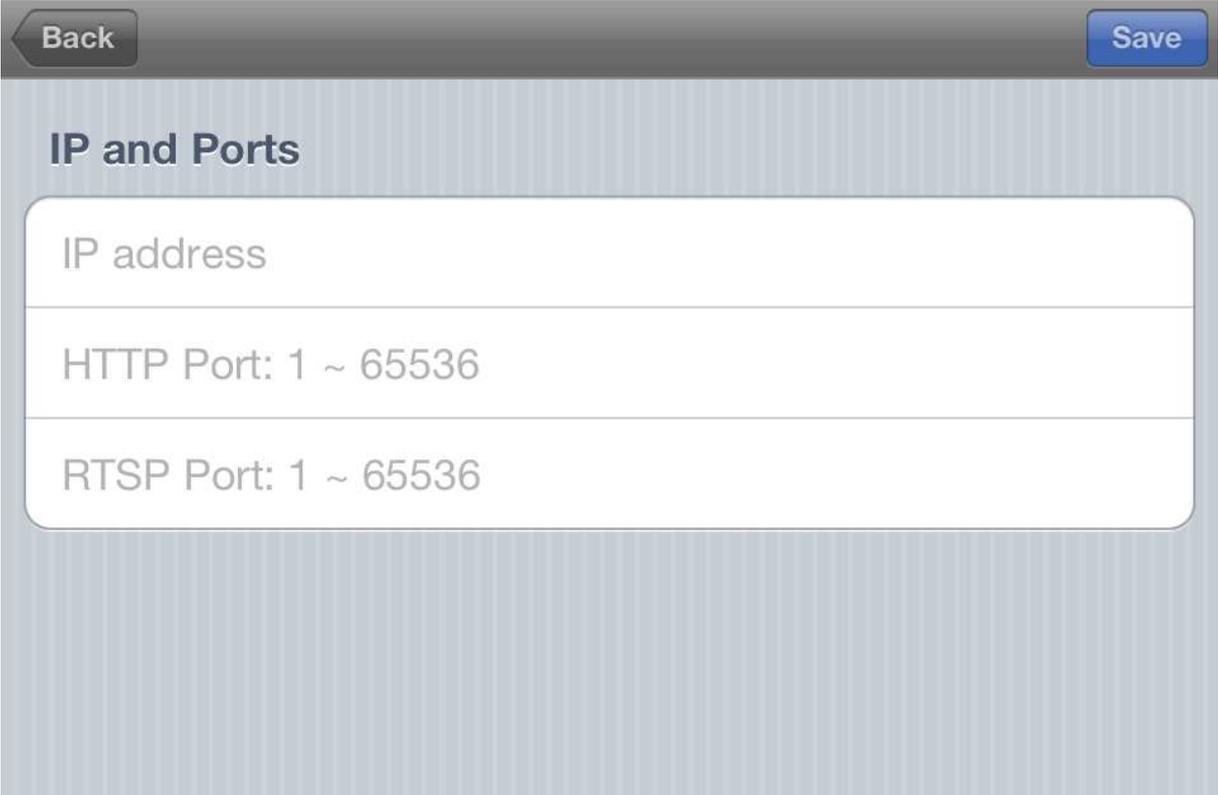

The screenshot shows a mobile application interface titled "IP and Ports". In the top left corner, there is a "Back" button, and in the top right corner, there is a blue "Save" button. Below the title, there are three stacked white text input fields. The first field is labeled "IP address". The second field is labeled "HTTP Port: 1 ~ 65536". The third field is labeled "RTSP Port: 1 ~ 65536".

10- Entrer l'ID « ADMIN » et le mot de passe « 1234 » puis cliquer sur « Save »

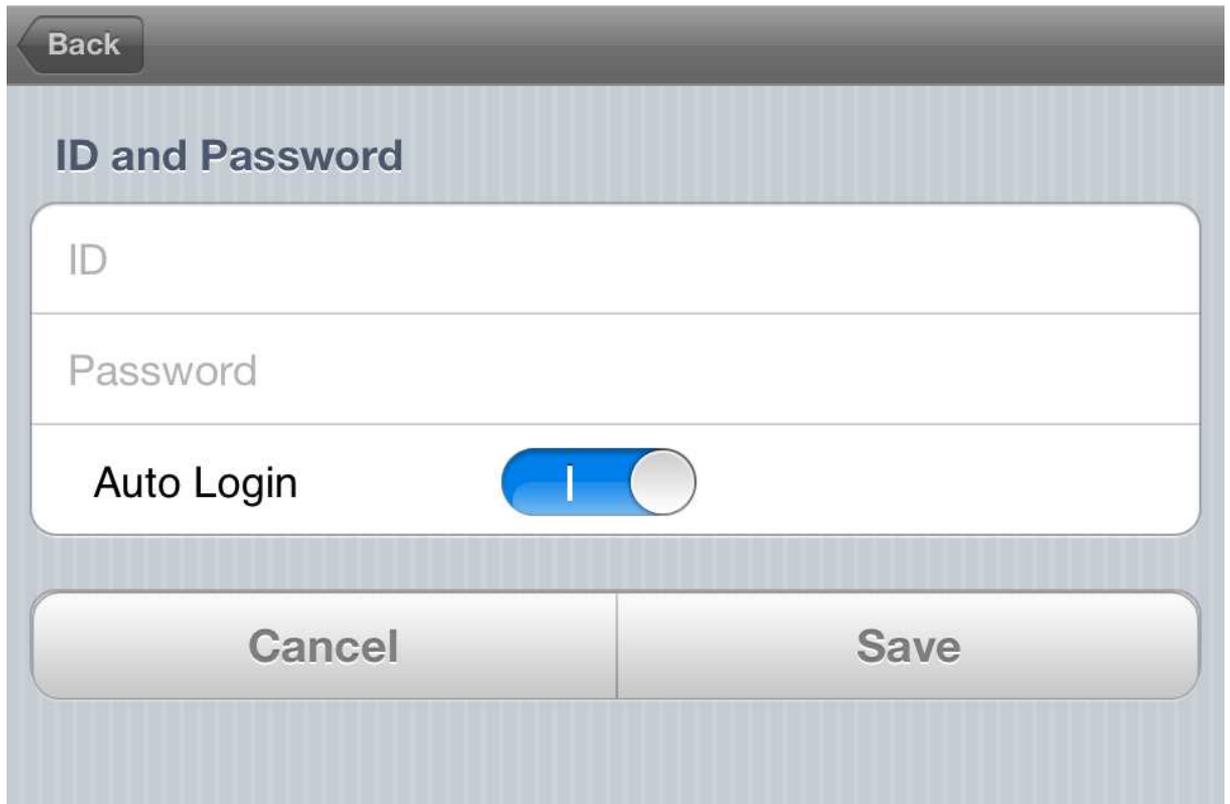

The screenshot shows a dialog box with a dark grey header containing a 'Back' button. The main area has a light blue background with the title 'ID and Password'. Below the title are three input fields: 'ID', 'Password', and 'Auto Login'. The 'Auto Login' field contains a blue toggle switch that is currently turned on. At the bottom of the dialog are two large, rounded buttons: 'Cancel' on the left and 'Save' on the right.

11- Si l'opération s'est bien déroulée votre site a correctement été ajouté dans l'application.
Pour vous y connecter il vous suffit de cliquer dessus.



RAPPEL IMPORTANT

Ne pas oublier d'ouvrir les ports et de les rediriger sur l'adresse IP locale du DVR en TCP. Si vous ne savez pas le faire, diriger vous vers la formation IP disponible sur le site <http://groupema.free.fr> rubrique « Formations »

Ports à ouvrir sur un 1004/8/16 VXH4/8/16: 6100 et 80.

Bonne Utilisation.